

FVG 72-125

Monocrystalline Silicon
Photovoltaic Module
Power peak 160 to 185 W

GENERAL DESCRIPTION

The FVG 72-125 photovoltaic module are suitable for residential systems

Stand-Alone, office buildings, solar power station, solar villages, villas, mountain cottages, pumps, traffic signs, radio relay stations, telecommunication system, telemeter system, lighting equipment.

The number of the cell are 72 and the max system voltage DC is 700V.

The FVG 72-125 photovoltaic modules are manufactured in according to the IEC 61215 standards.

CHARACTERISTICS

- 1.** The FVG 72-125 photovoltaic modules are manufactured with 72 125x125 mm monocrystalline silicon cells.
- 2.** The cells are laminated between sheets of ethylene vinyl acetate (EVA) and high-transmissivity low-iron 4mm tempered glass.
- 3.** The production process ensures to the cells the maximum protection against critical and environment conditions.
- 4.** Modules are extremely resistant thanks to the aluminum frame for extended outdoor use.
- 5.** The photovoltaic modules are made at our establishment in the province of Udine (Italy).

ELECTRO-OPTICAL CHARACTERISTICS

Code	Type	Model	Module Efficiency	Power Peak (W)	Vm (V)	Im (A)	Voc (V)	Isc (A)	Power Tolerance
50181	FVG 72 - 125	FVG 160M - MC	12,51%	160	34,5	4,64	43,2	5,07	+/- 5%
50183	FVG 72 - 125	FVG 165M - MC	12,90%	165	35,4	4,66	43,6	5,08	+/- 5%
50184	FVG 72 - 125	FVG 170M - MC	13,29%	170	35,6	4,78	44,2	5,15	+/- 5%
50185	FVG 72 - 125	FVG 175M - MC	13,68%	175	35,8	4,89	44,2	5,25	+/- 5%
50186	FVG 72 - 125	FVG 180M - MC	14,07%	180	36,2	4,97	44,2	5,36	+/- 5%
50187	FVG 72 - 125	FVG 185M - MC	14,46%	185	36,3	5,10	44,2	5,51	+/- 5%

Electrical specification at 1000 W/mq, 25 °C, AM 1,5.

WARRANTY

A: 2 Years Limited PV Modules Warranty

FVG Energy srl warrants the PV Module(s) to be free from the defects and/or failures specified below for a period not exceeding two (2) year from the date of sale to the original customer - ("Customer"):

- 1) defects and/or failures due to manufacturing;
- 2) defects and/or failures due to materials;
- 3) cracking of the front glass surface due to foreign objects inside the glass;

Note: This limited warranty shall exclude cracking of the front glass surface due to external shock from flying objects or external stress or transportation damages.

- 4) non-conformity to specifications due to faulty manufacturing and/or inspection processes.

If the PV Module(s) fails to conform to this warranty, FVG Energy srl will repair or replace the PV Module(s), at his sole option.

B. Limited Power Output Warranty of 20 years (90%- 80%)

FVG Energy srl warrants that if:


(a) within the first ten (10) years from the date of sale to the Customer, the PV Module(s) exhibits a power output of less than ninety percent (90%) of the original minimum rated power specified at the time of sale (Power peak minus the power tolerance %);

(b) within twenty (20) years from the date of sale to the Customer, the PV Module(s) exhibits a power output of less than eighty percent (80%) of the original minimum rated power specified at the time of sale (Power peak minus the power tolerance %)*, FVG Energy will deliver additional PV Module(s) to replace the missing power output, or repair or replace the PV Module(s), at FVG Energy srl sole option.

*The power output values shall be those measured under FVG Energy srl standard measurement conditions as follows: (a) light spectrum of AM 1.5; (b) irradiation of 1,000w per m²; and (c) a cell temperature of 25 degrees Centigrade.

For more information ask at your local dealer or directly at FVG Energy srl (www.fvgenergy.com) the full document of Warranty.

DIMENSIONS AND PACKING

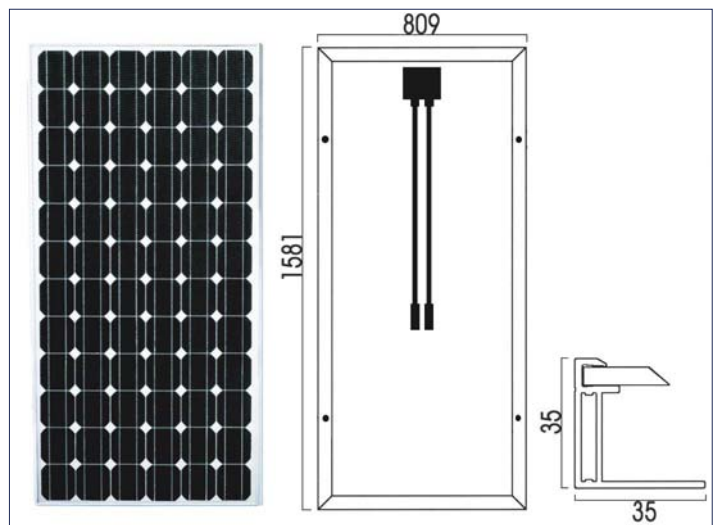

Module dimensions mm: 1581 x 809 x 35

Module Net Weight Kg: 16,5

Carton dimensions mm: 1610 x 830 x 90

Pallet dimensions cm: 161 x 83 x 185H

1 carton = 2 modules

1 pallet = 19 cartons = 38 modules

JUNCTION BOX



Junction box with cables and waterproof connectors, mounted on models MC. Cables length cm 90. With 3 Bypass diode.